


Pin	V1	V2	V3	V4	V5	V6
1	+150V	+150V	+150V	+250V	-----	-----
2	0	0	+3V	0	0	0
3	+90V	+1.5V	+60V	+2.2V	+9.2V	+9.2V
4	Header	Header	Header	Header	Header	Header
5	Header	Header	Header	Header	Header	Header
6	+150V	+150V	+150V	+150V	-----	-----
7	0	0	0	0	+250V	+250V
8	+75V	+1.0V	+3V	+3V	-----	-----
9	Header	Header	Header	Header	+250V	+250V

\* Oscillating Voltage

COMPONENT LAYOUT

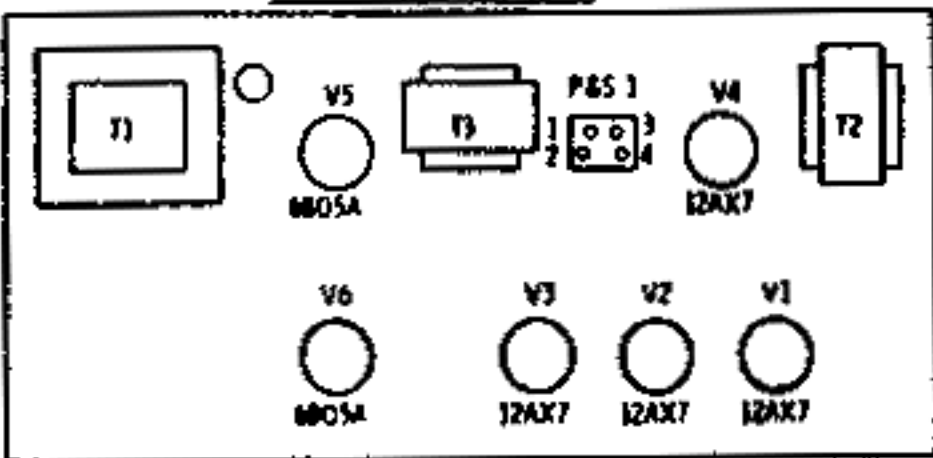

NOTES:

1. All resistors 1/2 watt 10% unless otherwise specified.
2. All capacitors are in microfarads unless otherwise specified.
3. All voltages measured to ground with Simpson 200 VOM.
4. See parts list for component part numbers.