
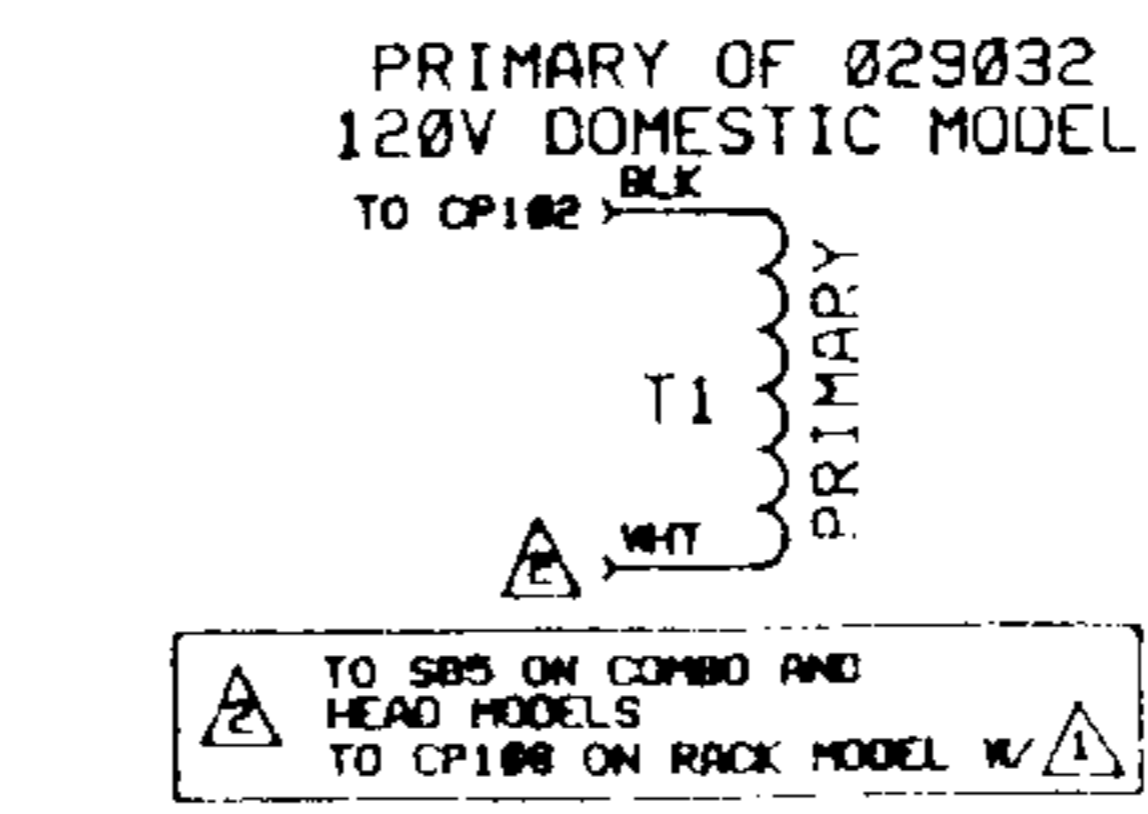
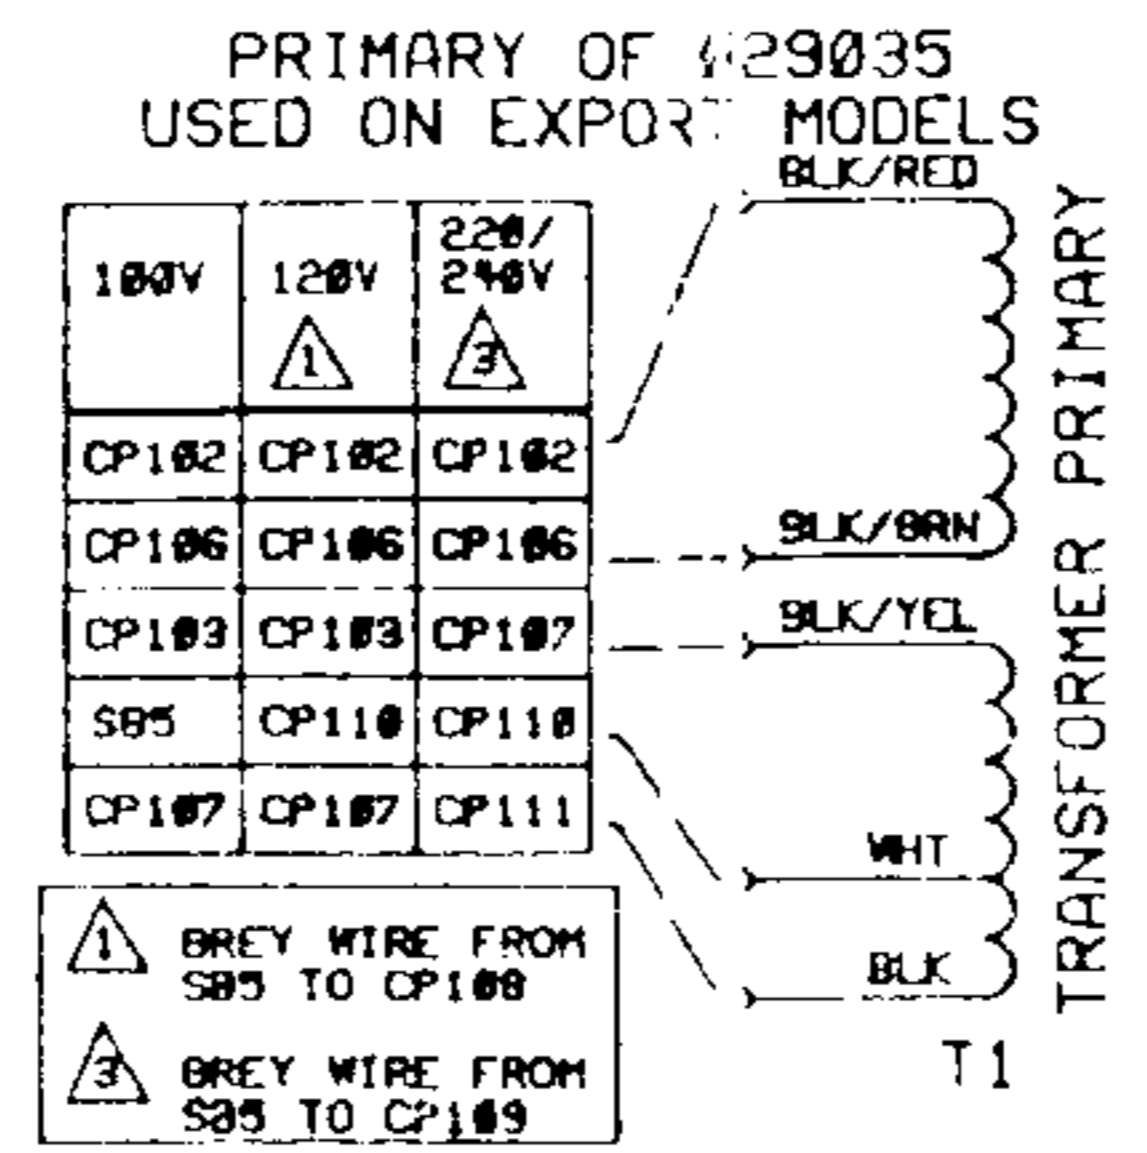


- NOTES:** UNLESS OTHERWISE SPECIFIED
1. ALL RESISTORS 1/4 WATT, ± 5%.
 2. ALL CAPACITORS 63 VOLT MINIMUM.
 3. SIX DIGIT NUMBERS ARE FENDER P/N'S.
 4. ALL VOLTAGES MEASURED USING DVM WITH MINIMUM 100Ω INPUT IMPEDANCE, AND MAY VARY ± 20%. LINE VOLTAGE SET TO 120 VAC, 60 HZ.
 5. DC VOLTAGES READ TO GROUND WITH NO INPUT TO AMP AND FOOTSWITCH DISCONNECTED. NOTE: ON U101 & U102 PINS 1, 2, 3, 5, 6, 7, MEASURE -15V.
 6. AC RMS VOLTAGES ARE READ UNDER THE FOLLOWING CONDITIONS:
 - 1 kHz SINE WAVE INPUT TO J1.
 - 8Ω RESISTIVE LOAD ACROSS CP129/130.
 - REVERB CONTROL SET TO "0".
 - ALL OTHER CONTROLS SET TO MAXIMUM.
 - SELECT SWITCH OFF.
 - BUITAR CORD CONNECTED BETWEEN PREAMP OUT & POWER AMP IN JACKS.
 7. RATED OUTPUT POWER - 60 WATTS RMS AT 5% THD, UNDER SAME CONDITIONS AS NOTE 6, EXCEPT INPUT INTO J102, POWER AMP IN.

NOTE: USE ONLY SLO-BLO FUSES.

LINE VOLTAGE	100V	120V	220V	240V
F1	3A	2.5A	1.6AT	1.6AT
F2	4A	3A	2AT	2AT
MINIMUM VOLTAGE RATING	125VAC	250VAC		

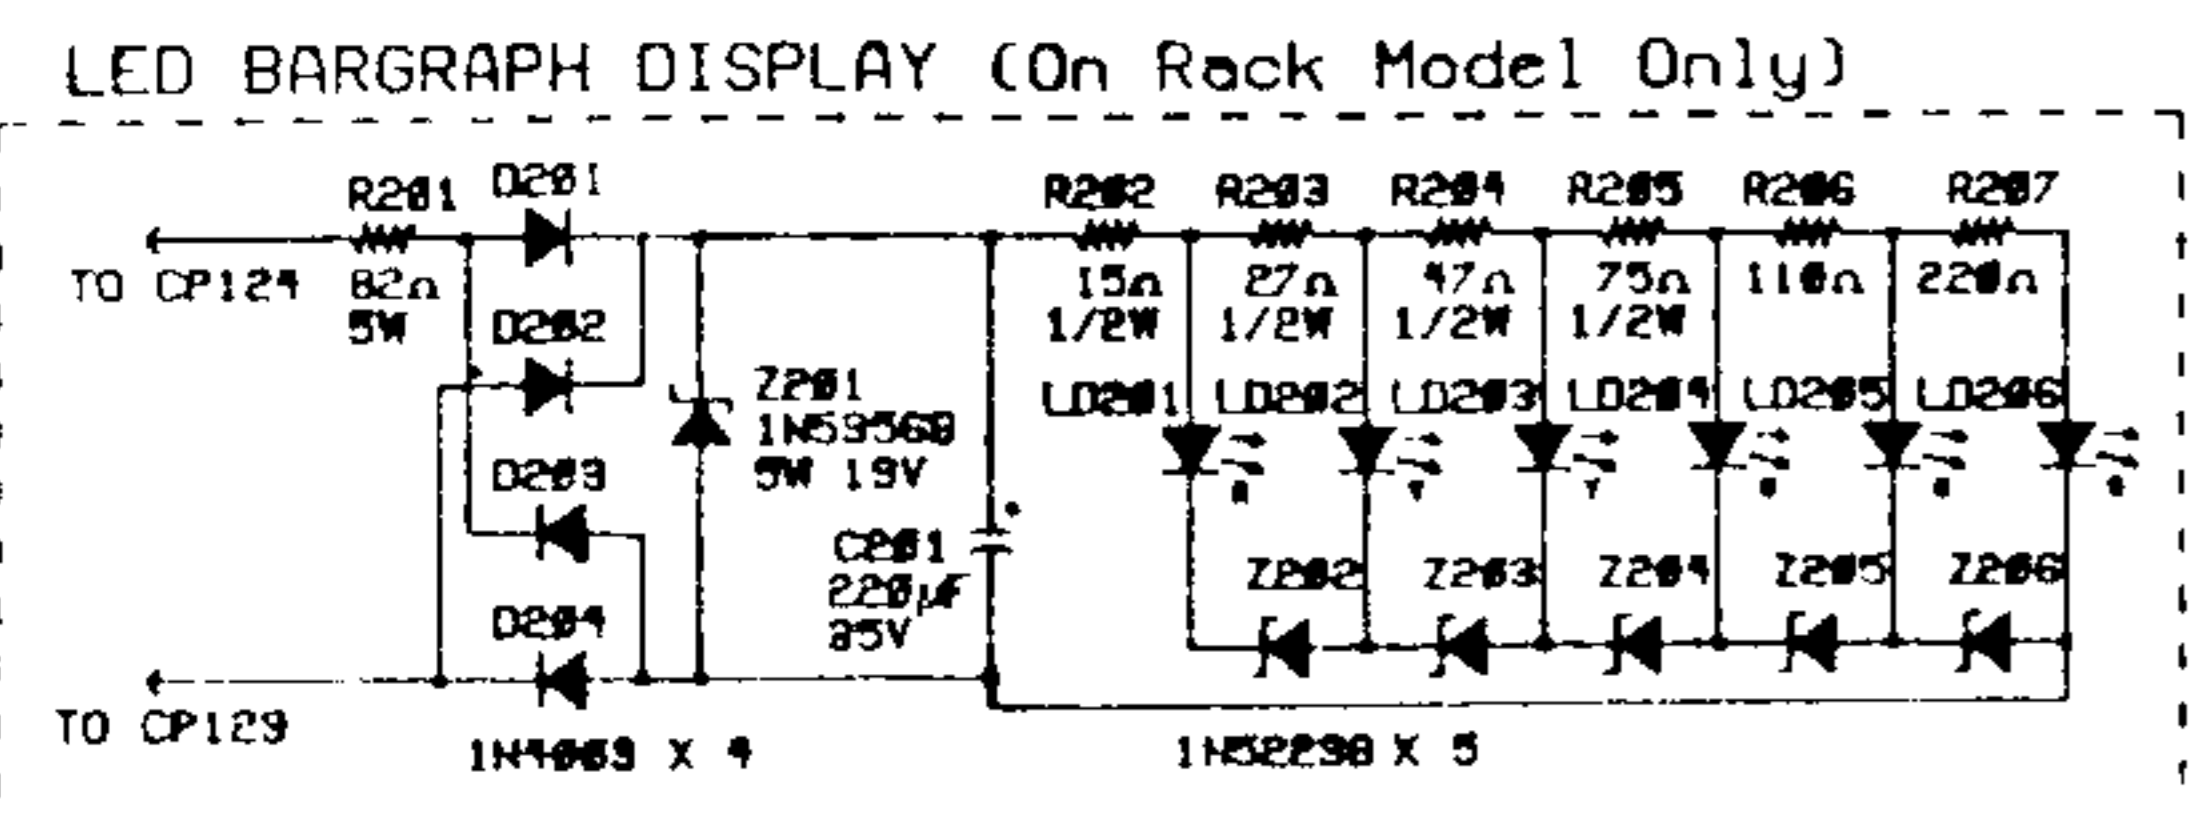

DATABASE FILE: S115.DOF
CHECKED BY: JLS
DATE: 1/14/90
APPROVED: JLS
DATE: 1/12/90

TOLERANCES:
 X.X .005"
 X.XX .0025"
 X.XXX .0015"
 XXXX .0005"

PROPRIETARY
 MUSICAL INSTRUMENTS
 1190 Columbia Street
 Brea, Ca. 92621

TITLE: SCHEMATIC SUPER AMP
SIZE: 0
DATE: 12/27/88
REV.: 1 OF 1